

## OBTAINING CELLULOSE BASED ON PAVLONA WOOD AND BANANA STOBLES AND ANALYSIS OF COMPARATIVE CHARACTERISTICS AT DIFFERENT STAGES

**\*\*Sandybaeva Zamira Hudayberdievna**

**\*\* Osh State University**

**\*Murodov Muzaffar Murodovich,**

**\*Tashkent Innovative Chemical-Technological  
Scientific-Research Institute**

### **Abstract:**

Because the soft and delicate structure of the Pavlonia tree does not require a 2-3 step sequence in the synthesis process. During the study, cellulose synthesis was carried out in parallel from samples of Pavlonia wood belonging to different years, i.e. deignefication process was carried out in an autoclave under high pressure, as well as by hydrolysis at 95-1000C. His research also includes years of research into the synthesis of certain brands of cellulose that are chemically recyclable based on Pavlonia tree stems. It is known that various chemical processes are used during cellulose synthesis. The sodium method was used in this study. In the process of cellulose synthesis, the balance of the 2nd, 4th, and 18-year-old stems of the Pavlonia tree was used to form a ridge.

**Keywords:** moisture, cellulose, concentration, pentosan, alkali sediment, suffocation, ash content, peacock tree, banana stem, degree of polymerization, parameter, optimal conditions, destruction.

Strengthening the independence of the Republic of Uzbekistan in the economic sphere provides for the creation of its own production facilities for the production of pulp and paper industry products based on local cellulose-containing plants. Cellulose, as the most widespread natural polymeric material, is one of the most important semi-finished products used in the paper, textile and chemical industries. The main plant raw material for the production of cellulose is softwood, hardwood and cotton lint. Cellulose can also be obtained from such non-woody plant species as flax, cotton stalks

(guza-pay), hemp, jute, kenaf, etc. However, over the past 20-30 years, annual plants have also become widespread: rye, barley straw, wheat, rice and cane. Abroad, cellulose is also obtained from bamboo and bagasse. The economic feasibility of processing short-staple cotton lint (delint) and rice straw into bleached and unbleached pulp, suitable for producing paper and cardboard for various purposes, is shown. At present, the share of products of the paper industry of Uzbekistan in this is still only 10-12%, the rest of the paper is imported mainly from Russia.

It should be emphasized that the amount of rice straw in the Republic of Uzbekistan is annually at least 300 thousand tons, and cotton lint 100-120 thousand tons, the processing of which can meet the republic's need for paper and cardboard products. For example, in the near future it is planned to build a plant in the city of Shirin, Syrdarya region for the production of paper from agricultural waste of cotton stalks (guza-pai) and wheat straw with a capacity of 160 tons per day based on Chinese technology. But despite the presence of a significant raw material base, in recent years, researchers and technologists have been intensively searching for new types of cellulose-containing raw materials for the production of cellulose and, based on it, paper and paper products. The large-scale application of a single cellulose and its simple and complex esters in the above-mentioned industries gives promising results. This in turn is the pulp for these industries and the production of organic-based organic substances, simple and complex esters for export-oriented and import-substituting modified composite polymer materials and the creation of large innovative technologies for industrial-scale implementation and the application of positive results in production.

In this regard, the production of organic substances and products based on them in our country on the basis of innovative approaches based on them - the development of a variety of materials technologies - the creation of a new range as well as a number of studies with positive results on expanding the export of their analogues by reducing imports [1-9]. The Action Strategy for the further development of the Republic of Uzbekistan states important tasks aimed at: "Development of production of completely new types of products and technologies, including foreign and ensuring the production of competitive local products in domestic markets".

In this regard, further development of the chemical industry through the transition to a new stage, which is considered to have an innovative content produced and scientific research in the direction of creating new product manufacturing technology with diversification. Development of production of handicraft building materials wood and wood shavings in the Republic to meet the demand for wood products in the furniture industry sharply reduce imports as well as the Cabinet of Ministers of the Republic of Uzbekistan to meet the needs of the population in alternative energy "ON MEASURES FOR THE RESTORATION OF FAST-GROWING AND INDUSTRIAL PAVLOVNY TREE PLANTATIONS IN THE REPUBLIC" Resolution № 520 of 27 August 2020.

In accordance with this, the Ministry of Agriculture of the Republic of Uzbekistan with the involvement of scientists from the Ministry of Agriculture of the Republic of Uzbekistan will allocate at least 100 hectares of land for each project to establish pavlovnia plantations to ensure the production of wood and wood chips, increase the efficiency of the furniture and pellet industry, based on the biological characteristics of the peacock tree and the soil-climatic conditions of the regions, to provide scientific recommendations for the establishment of peacock plantations [10-21].

According to the resolution, pavlovnia plantations will be established in 2020-2024 on a pilot basis in unused reserve areas with water shortages, groundwater levels below 30 meters, as well as in lands with water shortages or saline soils of the forest fund.

According to the resolution, 2 million 990 thousand saplings of peacock trees will be planted on 4,000 hectares of reserve lands and 747,500 peacock trees on 1,000 hectares of forest lands through the establishment of pavlovnia plantations in the country in the coming years.

The Council of Ministers of the Republic of Karakalpakstan, regional khokimiyats allocate land plots to applicants for the cultivation of pavlovnia on a lease basis.

Not less than 100 hectares of land will be allocated for each project for the construction of Pavlovnia plantations. Also, the pavlovnia tree as part of the annual week of innovative ideas from 2021 and manufacturing entrepreneurs with samples of products derived from it and farmers will be introduced on a large scale [22-38].

In this dissertation research, for many years, research has been conducted on the synthesis of some brands of cellulose that are suitable for chemical processing on the basis of Pavlonia tree stems.

It is known that various chemical processes are used during cellulose synthesis. The sodium method was used in this study. Because the soft and delicate structure of the Pavlonia tree does not require a 2-3 step sequence in the synthesis process.

During the study, cellulose synthesis was carried out in parallel from samples of Pavlonia wood belonging to different years, i.e. delegnefication process was carried out in an autoclave under high pressure, as well as by hydrolysis at 95-1000C. In the process of cellulose synthesis, the balance of the 2nd, 4th, and 18-year-old stems of the Pavlonia tree was used to make a stalk.

**TABLE-1 Qualitative characteristics of cellulose obtained from Pavlonia tree stalks grown in different years Influence of NaOH concentration (0.5-2.0% HNO<sub>3</sub> 30 minutes hydrolysis at 98-1000C)**


| № | Description        | Chemical consumption |           | Yield of cellulose, % | Sol, % | DP- degree polymerization | whiteness, % |
|---|--------------------|----------------------|-----------|-----------------------|--------|---------------------------|--------------|
|   |                    | HNO <sub>3</sub> , % | NaOH, г/л |                       |        |                           |              |
| 1 | Paulownia 2 years  | 0,5                  | 25        | 72                    | 6,4    | -                         | -            |
|   |                    | 1,0                  | 30        | 64                    | 4,3    | 1280                      | 66,73        |
|   |                    | 1,5                  | 35        | 62                    | 4,0    | 1150                      | 67,02        |
|   |                    | 2,0                  | 40        | 56                    | 3,8    | 980                       | 69,24        |
| 2 | Paulownia 4 years  | 0,5                  | 25        | 69                    | 5,3    | -                         | -            |
|   |                    | 1,0                  | 30        | 66                    | 4,1    | 1270                      | 65,21        |
|   |                    | 1,5                  | 35        | 61                    | 4,0    | 1090                      | 67,02        |
|   |                    | 2,0                  | 40        | 55                    | 3,8    | 950                       | 68,94        |
| 3 | Paulownia 6 years  | 0,5                  | 25        | 67                    | 5,6    | -                         | -            |
|   |                    | 1,0                  | 30        | 65                    | 3,9    | 1320                      | 68,10        |
|   |                    | 1,5                  | 35        | 60                    | 3,7    | 1010                      | 69,01        |
|   |                    | 2,0                  | 40        | 51                    | 3,1    | 870                       | 69,98        |
| 4 | Paulownia 18 years | 0,5                  | 25        | 64                    | 4,7    | 1260                      | 65,94        |
|   |                    | 1,0                  | 30        | 56                    | 3,7    | 820                       | 70,02        |
|   |                    | 1,5                  | 35        | 51                    | 4,8    | 740                       | 70,82        |
|   |                    | 2,0                  | 40        | 48                    | 5,4    | 640                       | 72,30        |

It can be seen from Table 1 that the quality of cellulose obtained from the stems of trees of different years of the Pavlonian tree is almost indistinguishable. On the contrary, the soft porosity of the structure of the Pavlonian tree made it easier to delegate due to less chemical reagents and energy savings due to acid hydrolysis. That is, after hydrolysis of HNO<sub>3</sub> solution from 0.1% to 2.0%, the yield of cellulose under the influence of different concentrations of NaOH (from 25g / l to 40g / l) is 66%, the degree of polymerization is 1320, the ash content is 6.4 to 3, A decrease of 1%, the initial whiteness level of 69% without the action of cellulose bleaching reagents released at the end of the synthesis process was mastered as a result of experiments. This can be seen from the quality indicators given in the table the high reactivity of cellulose is due to its simple for chemical processing and it is known to be useful in obtaining complex ethers.


According to EADaily, in December 2017, during a visit to Karakalpakstan, the President of the Republic of Uzbekistan proposed to stop the cultivation of cotton on low-yielding lands and replace them with high-yielding plants. Uzbekistan started growing bananas on May 20, 2018.

In the field of banana growing, which is developing in the country, various mechanical treatments, as well as chemical processing of unnecessary banana stalks formed in the

last stages of the growing season and practical studies of the production of organic substances and products based on them, which are necessary for the existing industries, by studying the conditions of cellulose synthesis. Inadequate consumption of fiber not only affects the activity of the digestive system, but also the activity of the whole organism. "Pollution" of the body leads to a decrease in the effectiveness of the immune system, as a result of which the human body becomes prone to various diseases. But adequate consumption of coarse dietary fiber can help treat dysbacteriosis, which is one of the most common causes of gastrointestinal disease. From the pictures we can see that the composition of banana fibers and their high reactivity indicate their suitability for chemical processing, as well as those of wood cellulose.

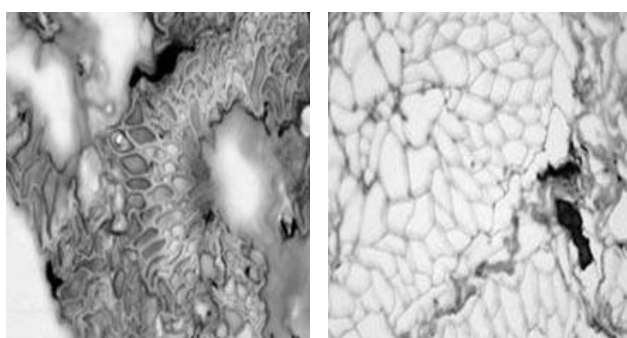

**Pic. -1: Optical micro-images of banana fiber sections;**  
a) unprocessed. b) recycled (x400)

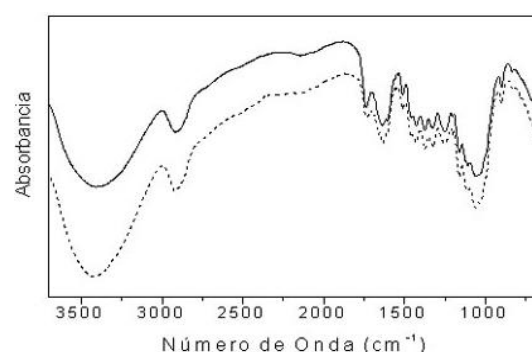

**Pic-2: Infrared spectra of processed and unprocessed banana fibers; a) not processed. (... ) b) processed. (-)**

The research on bananas was carried out in the Andijan region on the stems of a banana fruit tree grown in hydroponic greenhouses built in cooperation with the Turkish company "Asi Modern Serachilik". At the same time, the sodium method of cellulose synthesis was used, which is considered the most optimal solution for the conditions of Uzbekistan. The effect of various parameters on some quality indicators of the resulting banana cellulose, including boiling time, alkaline (NaOH) concentrations, was studied. The following table shows the effect of alkaline boiling time.

**TABLE-2 The effect of alkaline boiling time (98-1000S) on the quality characteristics of banana-based cellulose is shown.**

| №  | Alkaline boiling        |                   | Quality indicators of the finished product. |                        |                   |                          |              |                  |
|----|-------------------------|-------------------|---------------------------------------------|------------------------|-------------------|--------------------------|--------------|------------------|
|    | NaOH concentration, g/l | Boiling time, min | fertility, %                                | $\alpha$ -cellulose, % | Gemi-Cellulose, % | DP-degree polymerization | Whiteness, % | Amount of ash, % |
| 1  | 60                      | 30                | -                                           | -                      | -                 | -                        | -            | -                |
| 2  | 60                      | 60                | -                                           | -                      | -                 | -                        | -            | -                |
| 3  | 60                      | 120               | -                                           | -                      | -                 | -                        | -            | -                |
| 4  | 60                      | 180               | 57,1                                        | -                      | -                 | -                        | 59           | 7,4              |
| 5  | 60                      | 240               | 56,8                                        | -                      | -                 | -                        | 61           | 6,2              |
| 6  | 60                      | 300               | 53,3                                        | 76,7                   | 17,5              | 1350                     | 63           | 5,1              |
| 7  | 60                      | 360               | 49,8                                        | 81,1                   | 12,1              | 1270                     | 67           | 4,6              |
| 8  | 60                      | 420               | 48,2                                        | 91,2                   | 8,7               | 1210                     | 72           | 2,8              |
| 9  | 60                      | 480               | 42,7                                        | 92,9                   | 5,9               | 960                      | 78           | 2,1              |
| 10 | 60                      | 540               | 31,2                                        | 93,6                   | 1,7               | 780                      | 80           | 1,7              |

The results of the study showed that the increase in alkali boiling time has a positive effect on some quality indicators of fiber synthesized on the basis of banana stalks that is, as a result of increasing the alkaline boiling time, the yield of cellulose is 48.2%,  $\alpha$ -cellulose 91.2%, PD 1210. 420 minutes was selected as the optimal mode of alkaline boiling time. Optimal regime: 60g / l, alkaline boiling time 420 minutes, yield 48.2,  $\alpha$ -cellulose 91.2%, PD 1210, whiteness 78%, ash content 2.8%.

## REFERENCES

- [1] M.M. Murodov. «Technology of making cellulose and its ethers by using raw materials» // *International Conference "Renewable Wood and Plant Resources: Chemistry, Technology, Pharmacology, and Medicine"*. Saint-Petersburg, Russia. June 21-24., 2011. 142-143.
- [2]. M.M. Murodov. «The technology of making carboxymethyl cellulose (cmc) by method monoapparatus» // *International Conference «Renewable Wood and Plant Resources: Chemistry, Technology, Pharmacology, and Medicine»*. Saint-Petersburg, Russia. June 21-24., 2011. 141-142.
- [3]. Ўзбекистон Республика Вазирлар Маҳкамаси “РЕСПУБЛИКАДА ТЕЗ ЎСУВЧИ ВА САНОАТБОП ПАВЛОВНИЯ ДАРАХТИ ПЛАНТАЦИЯЛАРИНИ БАРПО ҚИЛИШ ЧОРА-ТАДБИРЛАРИ ТЎҒРИСИДА” 2020 йил 27 августдаги 520-сонли қарори.
- [4]. Интернет: [https://xs.uz/uzkr/post/hududlarda -pavlovniya -plantatsiyalari -tashkil-qilinadi/](https://xs.uz/uzkr/post/hududlarda-pavlovniya-plantatsiyalari-tashkil-qilinadi/)

- [5]. Муродов, М. Х., & Муродов, Б. Х. У. (2015). Фотоэлектрическая станция с автоматическим управлением мощностью 20 кВт для учебного заведения. *Science Time*, (12 (24)), 543-547.
- [6]. Murodov, M. M., Rahmanberdiev, G. R., Khalikov, M. M., Egamberdiev, E. A., Negmatova, K. C., Saidov, M. M., & Mahmudova, N. (2012, July). Endurance of high molecular weight carboxymethyl cellulose in corrosive environments. In *AIP Conference Proceedings* (Vol. 1459, No. 1, pp. 309-311). American Institute of Physics.
- [7]. Murodov, M. M., Yusupova, N. F., Urabjanova, S. I., Turdibaeva, N., & Siddikov, M. A. (2021). OBTAINING A PAC FROM THE CELLULOSE OF PLANTS OF SUNFLOWER, SAFFLOWER AND WASTE FROM THE TEXTILE INDUSTRY.
- [8]. Murodov, M. M., Yusupova, N. F., Urabjanova, S. I., Turdibaeva, N., & Siddikov, M. A. Obtaining a Pac From the Cellulose of Plants of Sunflower, Safflower and Waste From the Textile Industry. *European Journal of Humanities and Educational Advancements*, 2(1), 13-15.
- [9]. Murodov, M. M., Xudoyarov, O. F., & Urozov, M. Q. (2018). Technology of making carboxymethylcellulose by using local raw materials. *Advanced Engineering Forum* Vols. 8-9 (2018) pp 411-412/©. *Trans Tech Publications, Switzerland*. doi, 10, 8-9.
- [10]. Primqulov, M. T., Rahmonbtrdiev, G., Murodov, M. M., & Mirataev, A. A. (2014). Tarkibida selluloza saqlovchi xom ashyoni qayta ishlash texnologiyasi. *Ozbekiston faylasuflar milliy jamiyati nashriyati. Toshkent*, 28-29.
- [11]. Рахманбердиев, Г. Р., & Муродов, М. М. (2011). Разработка технологии получения целлюлозы из растений топинамбура. *Итисодиёт ва инновацион технологиялар" илмий электрон журналы*, (2), 1-11.
- [12]. Elievich, C. L., Khasanovich, Y. S., & Murodovich, M. M. (2021). TECHNOLOGY FOR THE PRODUCTION OF PAPER COMPOSITES FOR DIFFERENT AREAS FROM FIBER WASTE.
- [13]. MURODOVICH, M. M., QULTURAEVICH, U. M., & MAHAMEDJANOVA, D. (2018). Development of Technology for Production of Cellulose From Plants of Tissue and Receiving Na-Carboxymethylcellulose On its Basis. *JournalNX*, 6(12), 407-411.
- [14]. Rahmonberdiev, G., Murodov, M., Negmatova, K., Negmatov, S., & Lysenko, A. (2012). Effective Technology of Obtaining The Carboxymethyl Cellulose From Annual Plants. In *Advanced Materials Research* (Vol. 413, pp. 541-543). Trans Tech Publications Ltd.
- [15]. Murodovich, M. M., Murodovich, H. M., & Qulturaevich, U. M. (2020). Obtaining technical carboxymethyl cellulose increased in main substance. *ACADEMICIA: AN INTERNATIONAL MULTIDISCIPLINARY RESEARCH JOURNAL*, 10(12), 717-719.

- [16]. Murodovich, M. M., Qulturaevich, U. M., & Mahamedjanova, D. Comparative Researches of the Composition and Properties Cmc in Different Degree of Polymerization. *JournalNX*, 6(12), 412-415.
- [17] Йўлдашева, Г. И., & Тешабаева, О. Н. (2020). Развитие цифровой экономики Республики Узбекистан. *Universum: экономика и юриспруденция*, (7 (72)), 4-6.
- [18] Teshabaeva, O., Yuldasheva, G., & Yuldasheva, M. (2021). DEVELOPMENT OF ELECTRONIC BUSINESS IN THE REPUBLIC OF UZBEKISTAN. *Интернаука*, (3-3), 16-18.
- [19] Ibragimovna, Y. G. (2022). ADVANTAGES OF CREDIT-MODULE SYSTEM IN THE FIELD OF EDUCATION. *INTERNATIONAL JOURNAL OF SOCIAL SCIENCE & INTERDISCIPLINARY RESEARCH* ISSN: 2277-3630 Impact factor: 7.429, 11, 14-16.
- [20] Йўлдашева, М. (2021). ЭФФЕКТИВНОЕ УПРАВЛЕНИЕ ИНВЕСТИЦИОННОЙ ДЕЯТЕЛЬНОСТЬЮ ИНФОРМАЦИОННО-КОММУНИКАЦИОННЫХ ТЕХНОЛОГИЙ УЗБЕКИСТАНА. *Студенческий вестник*, (3-4), 11-13.
- [21] Shermatova, G. Y. N. (2022). ANIQ FANLARNI O'QITISHDA AXBOROT TECHNOLOGIYALARIDAN FOYDALANISH. *Scientific progress*, 3(1), 372-376.
- [22] Yuldasheva, G. I., & Shermatova, K. M. (2021). THE USE OF ADAPTIVE TECHNOLOGIES IN THE EDUCATIONAL PROCESS. *Экономика и социум*, (4-1), 466-468.
- [23] Худаёрова, С. И. (2022). ОСОБЕННОСТИ МОРФОЛОГИЧЕСКОГО ФОРМИРОВАНИЯ ЛИСТЬЕВ У СОРТОВ ЛИМОНА (CITRUS L.) В ЗАЩИЩЕННЫХ МЕСТАХ. *БАҲҚАРОРЛИК ВА ЕТАКЧИ ТАДҚИҚОТЛАР ОНЛАЙН ИЛМИЙ ЖУРНАЛИ*, 15-18.
- [24] Қодирова, Г. О. Қ., & Худоёрова, Ф. (2021). РОЛЬ ОБРАЗОВАТЕЛЬНЫХ ТЕХНОЛОГИЙ В ПРЕПОДАВАНИИ ЯЗЫКА. *Scientific progress*, 2(3), 894-898.
- [25] Itolmasovna, K. S. (2022). DEVELOPMENT OF MARKETABLE PROPERTIES OF PROCESSED LEMON. *The American Journal of Agriculture and Biomedical Engineering*, 4(02), 21-25.
- [26] Муродов, М. М., & Чулиев, Л. Э. (2021, October). Турли Объектлар Асосида, Яъни Пахта Тозалаш Корхоналарининг Толали Чиқиндилари Ва Павлония Ҳамда Банан Целлюлозаларидан Е-466 Олиш Технологияси Ва Унинг Физик-Кимёвий, Механик-Структуравий Хоссалари. In " *ONLINE-CONFERENCES" PLATFORM* (pp. 316-320).
- [27] Ibragimkhodjayev, A. M., Rakhmonberdiyev, G. R., Murodov, M. M., & Kodirov, O. S. (2009). "Influence of ripening process of cellulose from topinambour on its fractional composition. Chemistry and chemical technology. *Tashkent*, (4), 57.
- [28] Муродов, М. М., & Чулиев, Л. Э. (2021, October). Маҳаллий Хом Ашёлар Асосида Олинган Целлюлозалардан, Фармацевтика Ва Медицина Соҳалари

Учун Юқори Тозаликка Эга Е-466 Нинг Бир Нечта Маркаларини Олиш Технологияси. In " *ONLINE-CONFERENCES*" PLATFORM (pp. 309-315).

[29] Муродов, М. М. (2021). ПАВЛОНИЯ ДАРАХТИ ХАМДА БАНАН ПОЯСИ АСОСИДАГИ ЦЕЛЛЮЛОЗА СИНТЕЗИ ЖАРАЁНЛАРИНИ ЎРГАНИШ ВА СОЛИШТИРМА ХАРАКТЕРИСТИКАСИНИ ТУРЛИ БОСҚИЧЛАР ЁРДАМИДА ТАҲЛИЛ ҚИЛИШ. *Scientific progress*, 2(6), 1806-1813.

[30] Муродов, М. М. (2021). ПАХТА ТОЗАЛАШ КОРХОНАЛАРИНИНГ ТОЛАЛИ ЧИҚИНДИЛАРИ ҲАМДА ПАВЛОНИЯ ДАРАХТИ ВА БАНАН ПОЯЛАРИ АСОСИДА ОЛИНГАН ЦЕЛЛЮЛОЗАЛАРДАН, ФАРМАЦЕВТИКА ВА МЕДЕЦИНА СОҲАЛАРИ УЧУН ЮҚОРИ ТОЗАЛИККА ЭГА Е-466 НИНГ БИР НЕЧТА МАРКАЛАРИНИ ОЛИШ ТЕХНОЛОГИЯСИ. *Scientific progress*, 2(6), 1814-1823.

[31] Муродов, М. М. (2021). ТУРЛИ ОБЪЕКТЛАР АСОСИДА, ЯЪНИ ПТКТЧ ВА ПАВЛОНИЯ ҲАМДА БАНАН ЦЕЛЛЮЛОЗАЛАРИДАН Е-466 ОЛИШ ТЕХНОЛОГИЯСИ ВА УНИНГ ФИЗИК-КИМЁВИЙ, МЕХАНИК-СТРУКТУРАВИЙ ХОССАЛАРИ. *Scientific progress*, 2(6), 1824-1831.

[32] Муродов, М. М. (2021). МАҲАЛЛИЙ ХОМАШЁЛАР АСОСИДА ОЛИНГАН Е-466 СИНТЕЗИ ДАВРИДА МОДЕФИКАЦИЯЛАНГАН–КОМПОЗИТ КУМУШ ИОНЛИ МАРКАЛАРИДАН, МАЙИШИЙ КИМЁНИНГ МАВЖУД БИР НЕЧТА ТАРМОҚЛАРИДА ҚЎЛЛАШ. *Scientific progress*, 2(6), 1782-1791.

[33] Муродов, М., & Матчанова, Ф. (2020). СОЛНЕЧНАЯ БИОЭНЕРГЕТИЧЕСКАЯ УСТАНОВКА ДЛЯ УТИЛИЗАЦИИ БЫТОВЫХ ОТХОДОВ. *InterConf*.

[34] Муродов, М. М., Сидиков, А. С., & Уразов, М. К. (2019, September). 4.11. ПОЛУЧЕНИЕ Na-КМЦ И ПАЦ ИЗ ЦЕЛЛЮЛОЗЫ РАСТЕНИЙ ПОДСОЛНЕЧНИКА, САФЛОРА И ИЗ ОТХОДОВ ТЕКСТИЛЬНОЙ ПРОМЫШЛЕННОСТИ. In *VI Международная конференция* (p. 237).

[35] Муродов, М. М., Урозов, М. К., & Улуков, Ж. Т. САНОАТ КОРХОНАЛАРИНИНГ ТОЛАЛИ ЧИҚИНДИЛАРИНИ КИМЁВИЙ ҚАЙТА ИШЛАШ.

[36] Муродов, М. М., & Эшонкулов, М. Н. КАВРАК ЎСИМЛИГИ ЦЕЛЛЮЛОЗАСИ АСОСИДА Na-КМЦ СИНТЕЗИ ДАВРИДАГИ ОПТИМАЛ ПАРАМЕТРЛАРНИ АВТОМАТЛАШТИРИШ БОСҚИЧИГА ЎЗЛАШТИРИШ. In *КОНФЕРЕНЦИЯ-СИМПОЗИУМ* (p. 55).